
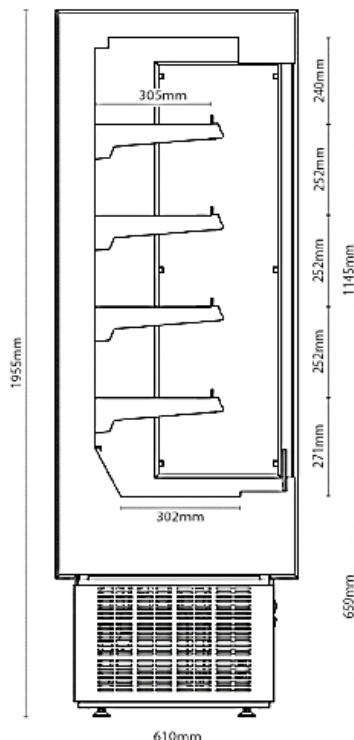


## Wall Cabinets - H-W060SS

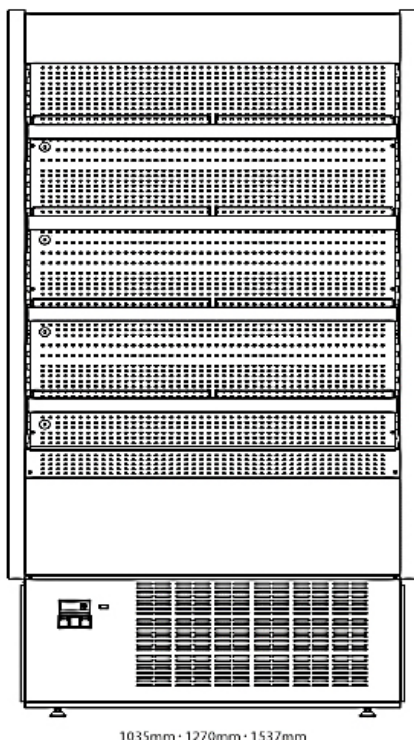

H-W060SS\*

### Technical parameters:

Model	Dimension (ext.) H x W x D [mm]	Display surface [m <sup>2</sup> ]	Shelves with low base	Weight [kg]
H-W060SS 100	1955 x 1035 x 610	1,41	5	167
H-W060SS 130	1955 x 1270 x 610	1,75	5	193
H-W060SS 150	1955 x 1537 x 610	2,15	5	238

\* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

## Wall Cabinets - H-W060SS



H-W060SS\*

### Description:

- temperature range +2 / +5°C
- preferred ambient temperature +16 / +25°C
- power supply 230V / 50Hz
- internal condensing unit
- ecological polyurethane insulation
- front panels made of PVC coated steel - grey colour
- base and side walls made of PVC coated steel - black colour
- solid side walls
- interior and shelves made of PVC coated steel - 'stainless steel' look
- 4 levels of adjustable shelves
- stainless steel product holders
- price strips
- interior top LED lighting - white
- night blind - manual
- electronic control with digital temperature display
- automatic defrost
- automatic condensate evaporation
- 1 year full warranty service and after warranty service provided

### Available options:

- multiplexing
- prepared to work with external condensing unit
- LED lights under each shelf
- LED lights under one shelf
- side walls with glass
- side walls with mirror
- front bumper

\* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.