
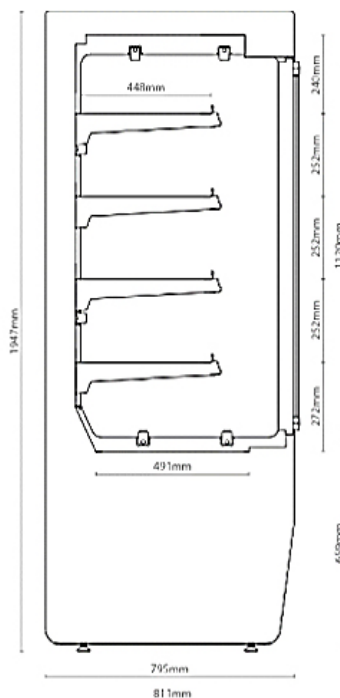


## Wall Cabinets - H-W081PT

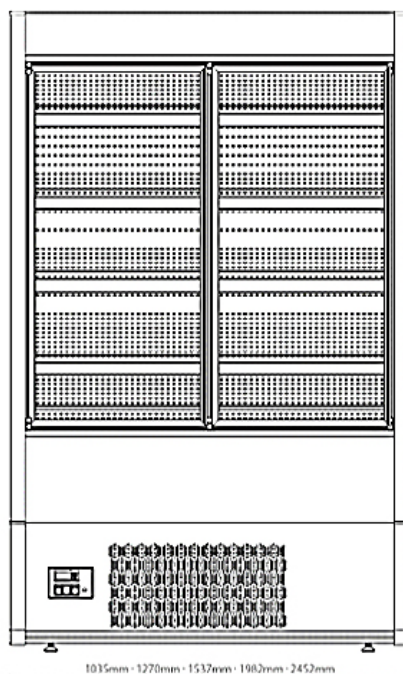

H-W081PT\*

### Technical parameters:

Model	Dimension (ext.) H x W x D [mm]	Display surface [m <sup>2</sup> ]	Shelves with low base	Weight [kg]
H-W081PT 100	1947 x 1035 x 811	2,13	5	203
H-W081PT 130	1947 x 1270 x 811	2,65	5	215
H-W081PT 150	1947 x 1537 x 811	3,25	5	235
H-W081PT 200	1947 x 1982 x 811	4,25	5	335
H-W081PT 250	1947 x 2452 x 811	5,30	5	450

\* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

## Wall Cabinets - H-W081PT



H-W081PT\*

### Description:

- temperature range 0 /+4°C
- preferred ambient temperature +16 / +25°C
- power supply 230V / 50Hz
- internal condensing unit
- ecological polyurethane insulation
- hinged self closing double glazed tempered glass door
- body and side walls made of PVC coated steel - white colour
- solid side walls
- interior and shelves made of PVC coated steel - 'stainless steel' look
- 4 levels of adjustable shelves
- stainless steel product holders
- price strips
- interior vertical LED lighting - white
- electronic control with digital temperature display
- automatic defrost
- automatic condensate evaporation
- 1 year full warranty service and after warranty service provided

### Available options:

- multiplexing
- prepared to work with external condensing unit
- LED lights under each shelf
- side walls with panoramic glass
- side walls with glass
- side walls with mirror
- front bumper

\* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.