


## Refrigerated Pastry Cabinet- J-Dolce



J-Dolce\*

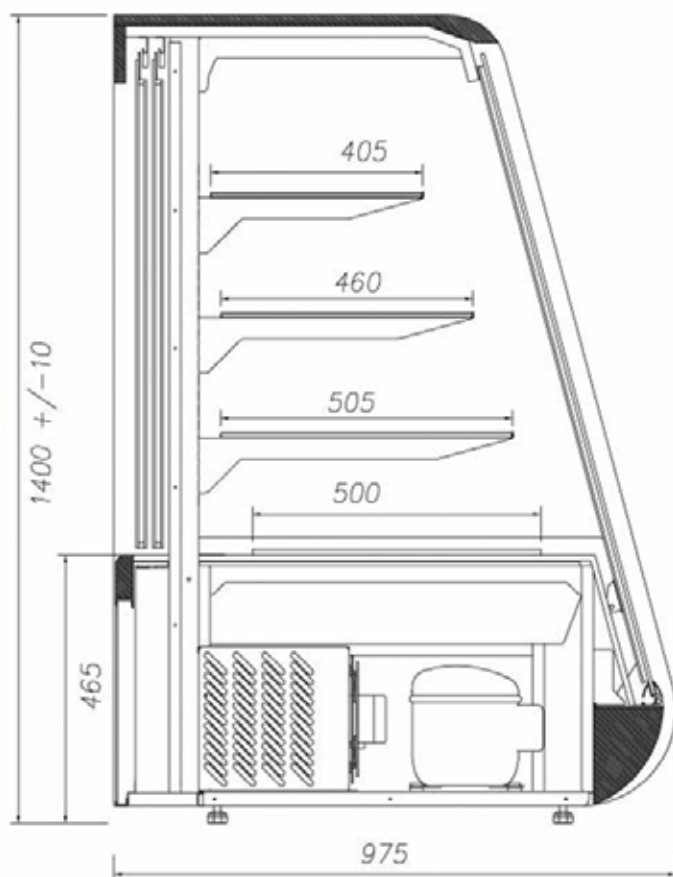

### Technical parameters:

Model	Dimensions (ext.) H x W x D [mm]	Display surface [m <sup>2</sup> ]	Power Consumption [kWh/24h]	Weight [kg]
J-Dolce 90	1400 x 960 x 975	1,50	10,00	210
J-Dolce 130	1400 x 1360 x 975	2,20	11,00	250

\* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

## Refrigerated Pastry Cabinet- J-Dolce



J-Dolce\*


### Description:

- temperature range +6 /+8°C
- preferred ambient temperature +16 / +25°C
- power supply 230V / 50Hz
- internal condensing unit
- ecological polyurethane insulation
- sides and top made of MDF (choice of colours)
- front and side glass with black serigraphy
- front glass openable - secured by chain
- 3 adjustable glass shelves with LED illumination (confectionary colour)
- top LED lighting (confectionary colour)
- sliding double glazed back door
- humidity reduction system
- electronic control with temperature display
- forced air circulation
- automatic defrost and condensate evaporation system
- 1 year full warranty service and after warranty service provided

### Available options:

- unit prepared to work with external condensing unit
- version for chocolates and pralines (+14/+16°C)
- ultrasonic humidifier
- sides and top made of MDF (optional colours)

### Choice of colours:

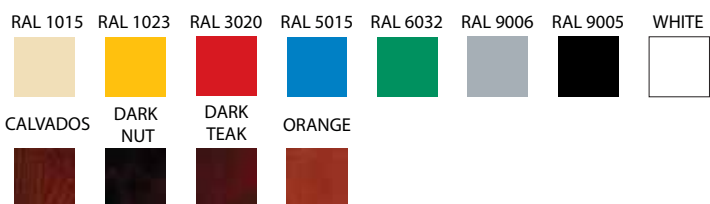

### Optional colours:



\* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.