


## Blast Chiller- C-SH-6GN

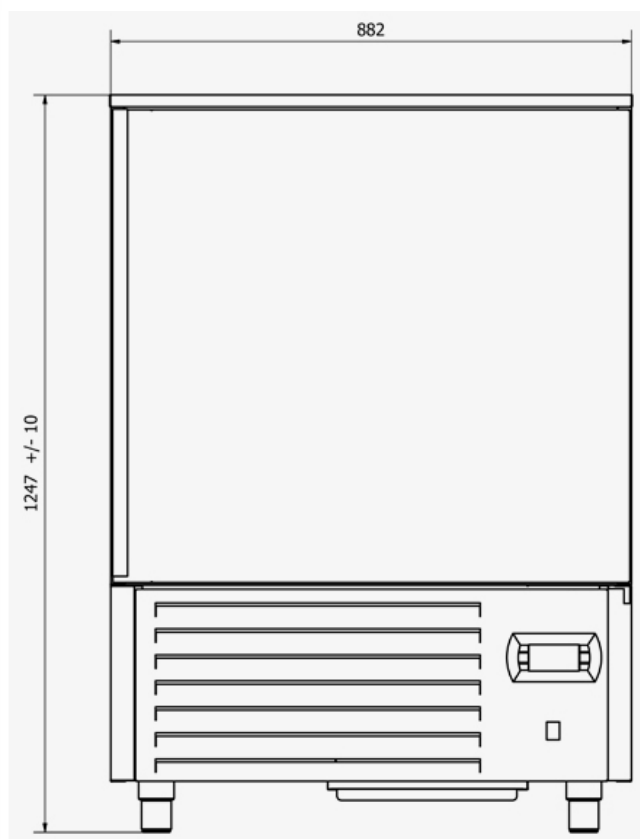

C-SH-6GN

### Technical parameters:

Model	Dimension (ext.)		Capacity	Power Consumption [kWh/24h]	Weight [kg]
	H x W x D [mm]				
C-SH-6GN	1247 x 822 x 740		6x GN1/1	31,20	150

\* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

## Blast Chiller- C-SH-6GN



### Description:

C-SH-6GN

- temperature range (+3) - (-36)°C
- preferred ambient temperature +16 / +32°C
- power supply 230V / 50Hz
- internal condensing unit
- ecological polyurethane insulation
- interior and body made of acid resistant stainless steel
- hinged door
- bactericidal UV light
- forced air circulation
- electronic control with digital temperature display
- automatic defrost and evaporation system
- 3 GN1/1 trays
- 1 year full warranty service and after warranty service provided

### Available options:

- additional GN containers
- set of wheels (castors)

\* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.