


Display Fridge - I-Impulse



I-Impulse*

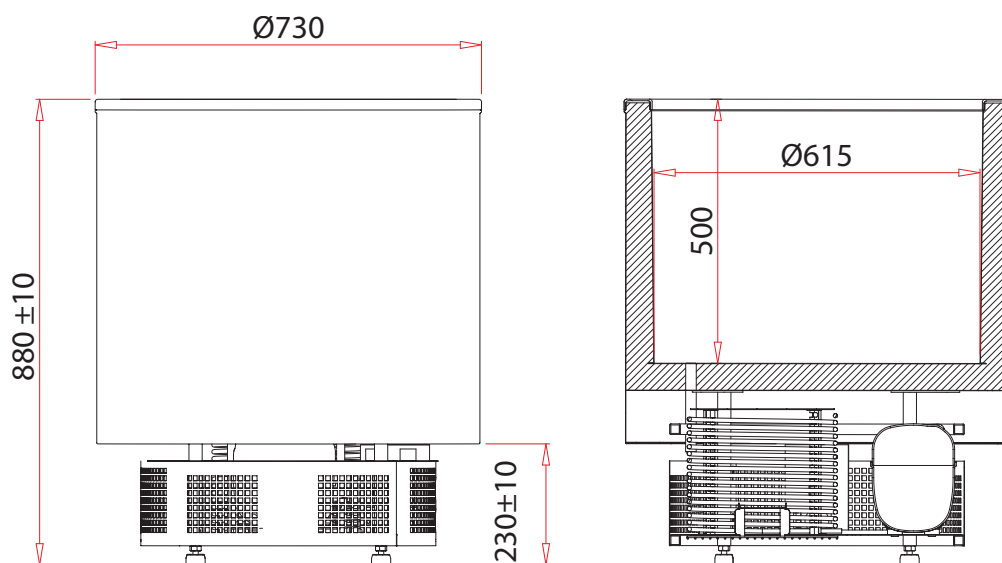

Technical parameters:

Model	Dimension (ext.) H x W [mm]	Capacity [dm ³]	Power Consumption [kWh/24h]	Weight [kg]
I-Impulse	880 x 730	120	2,10	60

* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

Display Fridge - I-Impulse



Description:


- temperature range +2 / +10°C
- preferred ambient temperature +16 / +25°C
- power supply 230V / 50Hz
- internal condensing unit
- ecological polyurethane insulation
- body made of powder-coated steel in white colour
- interior made of stainless steel
- static cooling
- maintenance-free condenser
- automatic defrost
- condensate drainage system through an external drain
- electronic temperature control
- 1 year full warranty service and after warranty service provided

I-Impulse*

Available options:

- body made of powder coated steel (optional colours)
- base colour (optional colours)
- base made of stainless steel
- external housing made of wood veneer (optional colours)

Optional steel colours:



Optional wood colours:



* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.