


Refrigerated Pastry Cabinet - I-Jamaica

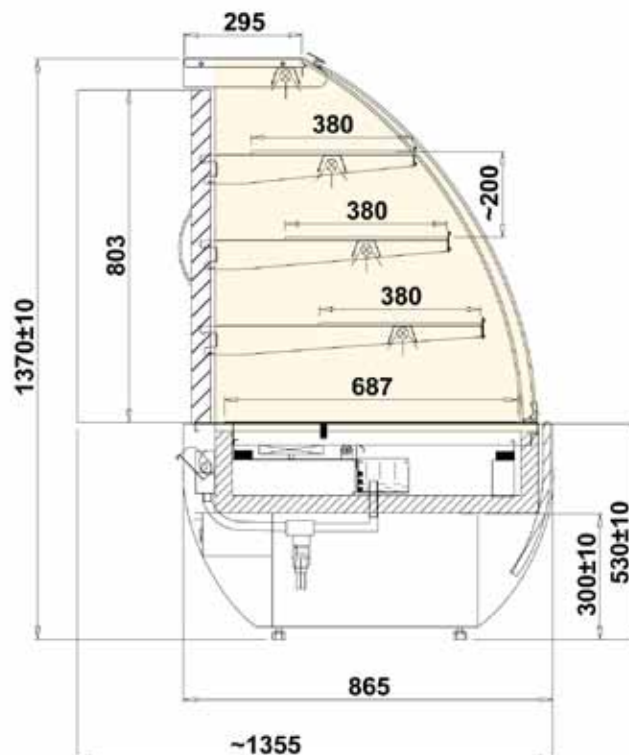

I-Jamaica*

Technical parameters:

Model	Dimensions (ext.) H x W x D [mm]	Display surface [m ²]	Power Consumption [kWh/24h]	Weight [kg]
I-Jamaica 0.7 V	1370 x 700 x 865	0,96	4,60	100
I-Jamaica 1.0 V	1370 x 1000 x 865	1,50	7,90	150
I-Jamaica 1.4 V	1370 x 1400 x 865	2,10	10,40	200

* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

Refrigerated Pastry Cabinet - I-Jamaica



Description:

- temperature range +5 / +15°C
- preferred ambient temperature +16 / +25°C
- power supply 230V / 50Hz
- internal condensing unit
- ecological polyurethane insulation
- wooden veneer side panels finish (choice of colours)
- wooden veneer body finish (choice of colours)
- bottom wooden shelf (choice of colours)
- shelves frame painted silver or gold
- glass exposition shelves with height and angle adjustment
- LED lighting under each shelf (confectionary colour)
- back sliding doors (I-Jamaica 0.7 hinged doors)
- openable curved front glass
- electronic control with temperature display
- automatic defrost system
- forced air circulation
- warm air blowing on front glass
- automatic condensate evaporation
- 1 year full warranty service and after warranty service provided

I-Jamaica*

Available options:

- multiplexing
- unit prepared to work with external condensing unit
- external housing made of stainless steel
- internal frame made of stainless steel
- bottom shelf made of stainless steel
- small tray (400mm x 420mm)
- bottom tray (400mm x 520mm)
- unit prepared for individual design - comes without wooden housing
- non refrigerated version available

Choice of colours:



* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.