
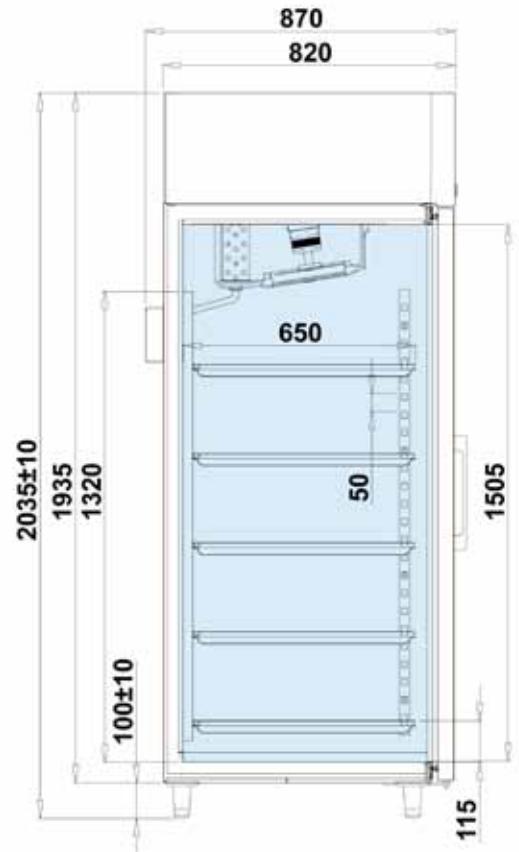


Catering Fridges- I-Jola 1 AG GASTRO

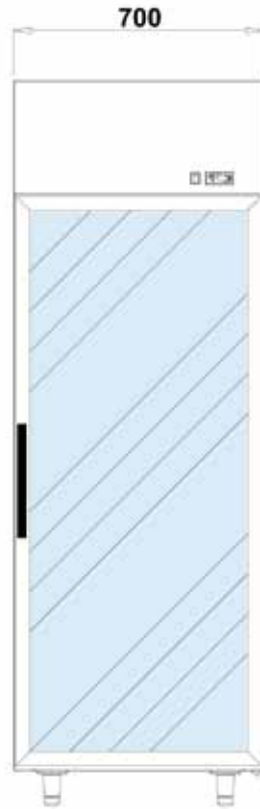

I-Jola 1 AG GASTRO*

Technical parameters:

Model	Dimension (ext.) H x W x D [mm]	Capacity [dm ³]	Shelves with low base	Power Consumption [kWh/24h]	Weight [kg]
I-Jola 1 AG GASTRO	2035 x 700 x 870	700	6	4,90	130

* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

Catering Fridges- I-Jola 1 AG GASTRO



Description:


- temperature range +1 / +10°C
- preferred ambient temperature +16 / +25°C
- power supply 230V / 50Hz
- internal condensing unit placed on the top
- ecological polyurethane insulation
- body made of powder coated steel in white colour
- interior made of stainless steel
- electronic control with digital temperature display
- self-closing glass door - choice of door opening direction
- 5 shelves (530x650mm)
- frame with rails prepared for GN1/1 trays
- forced air circulation with fan switch when doors are opened
- automatic defrost
- water condensate tray
- interior LED illumination
- 1 year full warranty service and after warranty service provided

I-Jola 1 AG GASTRO*

Available options:

- body made of powder coated steel - optional colours
- body made of stainless steel
- interior made of acid resistant stainless steel
- automatic condensate evaporation
- additional shelf
- GN 1/1 tray 40mm deep
- GN 1/1 tray 100mm deep

Optional colours:



* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.