


Catering Fridges- I-Jola 1 GASTRO

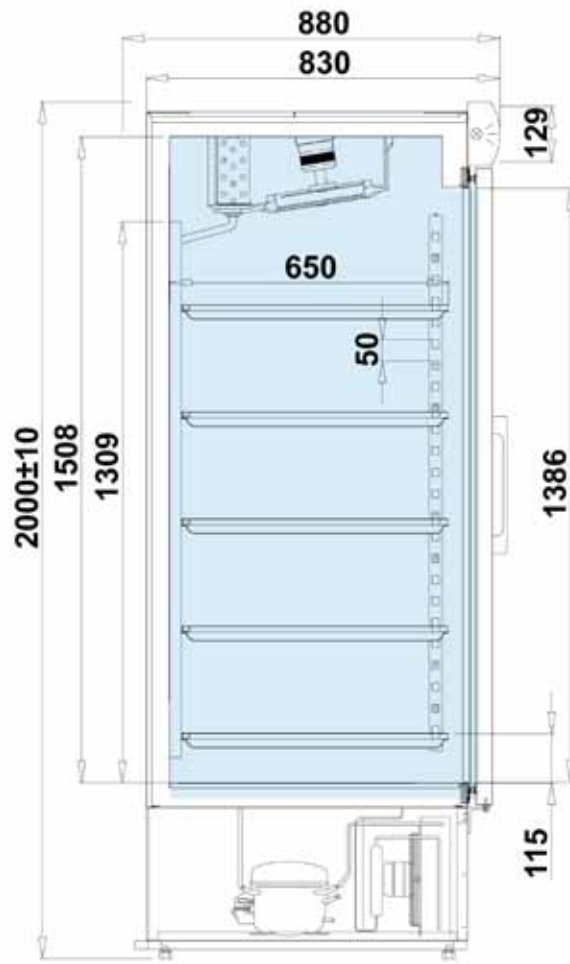

I-Jola 1 Gastro*

Technical parameters:

Model	Dimension (ext.) H x W x D [mm]	Capacity [dm ³]	Shelves with low base	Power Consumption [kWh/24h]	Weight [kg]
I-Jola 1 GASTRO	2000 x 700 x 880	700	6	5,00	120

* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

Catering Fridges- I-Jola 1 GASTRO



I-Jola 1 Gastro*


Description:

- temperature range +1 / +10°C
- preferred ambient temperature +16 / +25°C
- power supply 230V / 50Hz
- internal condensing unit
- ecological polyurethane insulation
- body made of powder coated steel in white colour
- interior made of stainless steel
- electronic control with digital temperature display
- self-closing glass door - choice of door opening direction
- 5 shelves (530x650mm)
- frame with rails prepared for GN1/1 trays
- forced air circulation with fan switch when doors are opened
- automatic defrost
- water condensate tray
- LED internal illumination - white colour
- LED illuminated banner above doors - choice of panel colours
- 1 year full warranty service and after warranty service provided


Available options:

- body made of powder coated steel - optional colours
- body made of stainless steel
- interior made of acid resistant stainless steel
- automatic condensate evaporation
- strengthened shelves
- additional shelf
- GN 1/1 tray 40mm deep
- GN 1/1 tray 100mm deep

Choice of colours:



Optional colours:



* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.