


Refrigerated Pastry Cabinet - I-Kameleo V



I-Kameleo V*

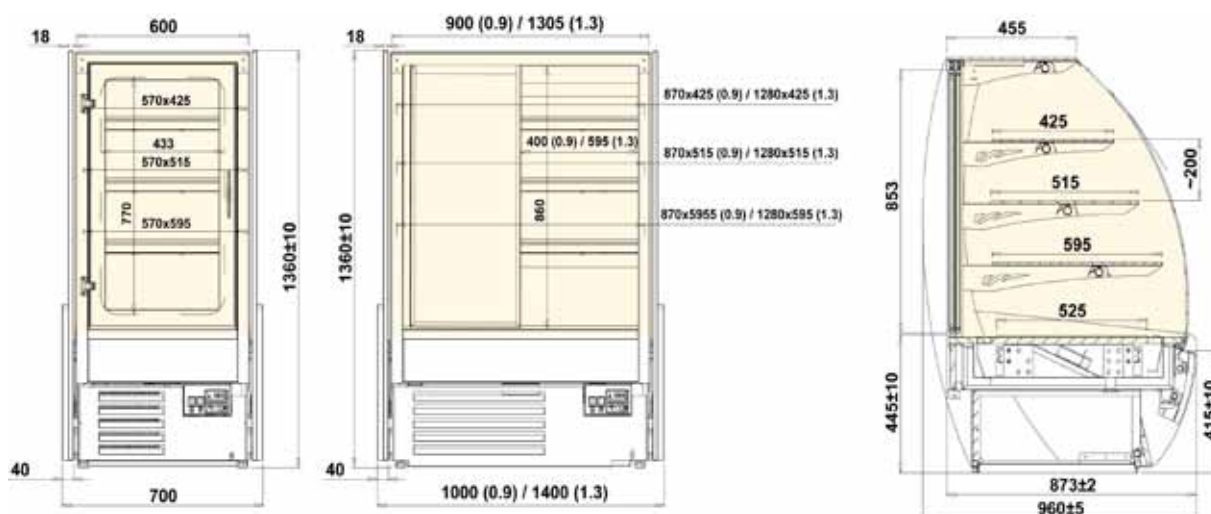

Technical parameters:

Model	Dimensions (ext.) H x W x D [mm]	Display surface [m ²]	Power Consumption [kWh/24h]	Weight [kg]
I-Kameleo 0.7 V	1360 x 705 x 960	1,20	4,70	120
I-Kameleo 1.0 V	1360 x 1005 x 960	1,80	8,00	170
I-Kameleo 1.4 V	1360 x 1405 x 960	2,60	10,60	220

* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

Refrigerated Pastry Cabinet - I-Kameleo V



I-Kameleo V*

Description:

- temperature range +5 / +15°C
- preferred ambient temperature +16 / +25°C
- power supply 230V / 50Hz
- wooden veneer side panels finish (choice of colours)
- wooden veneer front panel finish (choice of colours)
- wooden veneer plinth finish (choice of colours)
- ecological polyurethane insulation
- exposition shelves with height and angle adjustment
- shelves frame painted silver or gold
- LED lighting under each shelf (confectionary colour)
- bottom shelf made of stainless steel
- back sliding doors (I-Kameleo 0.7 hinged doors)
- openable curved front glass
- electronic control with temperature display
- automatic defrost system
- forced air circulation
- warm air blowing on front glass
- automatic condensate evaporation
- internal condensing unit
- 1 year full warranty service and after warranty service provided

Available options:

- multiplexing
- unit prepared to work with external condensing unit
- internal frame made of stainless steel
- small tray (400mm x 420mm)
- medium tray (400mm x 510mm)
- big tray (400mm x 590mm)
- bottom tray (400mm x 520mm)
- unit prepared for individual design - comes without wooden housing
- non refrigerated version available

Choice of colours:



* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.