


Display Fridges- I-Malta 1

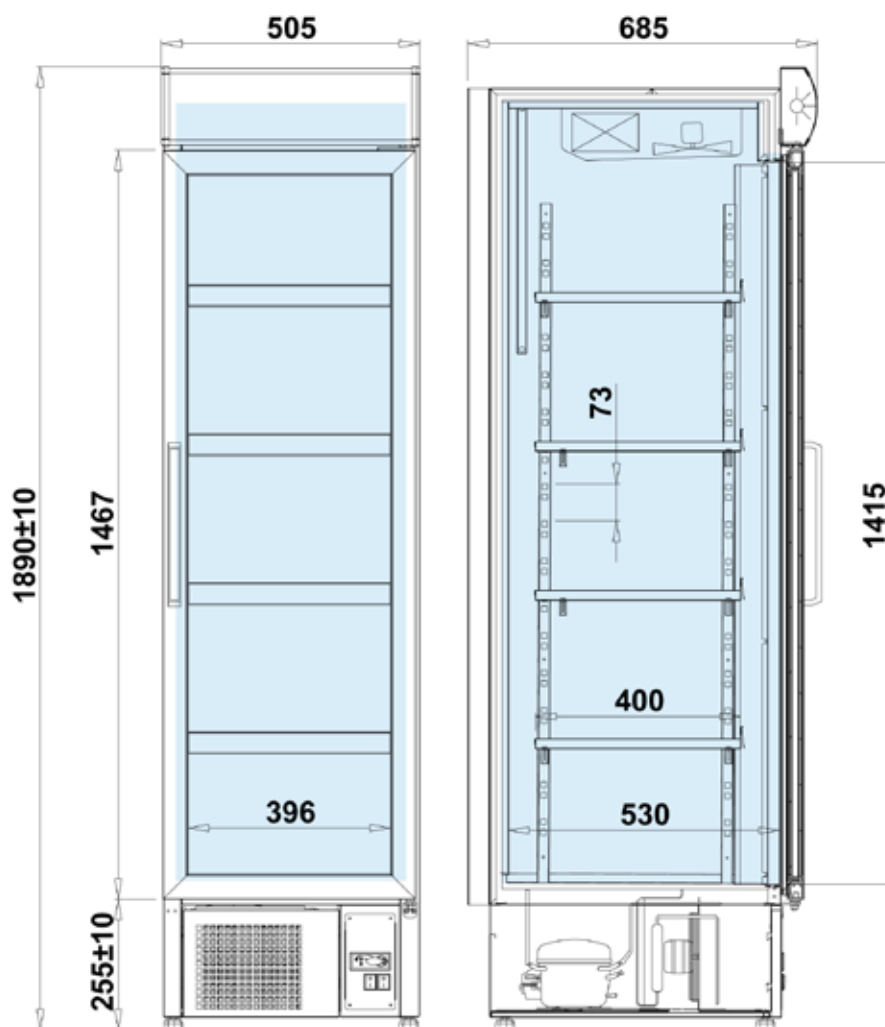

I-Malta 1*

Technical parameters:

Model	Dimension (ext.) H x W x D [mm]	Capacity [dm ³]	Shelves with low base	Power Consumption [kWh/24h]	Weight [kg]
I-Malta 1	1890 x 505 x 685	300	5	6,50	90

* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

Display Fridges- I-Malta 1


Description:

- temperature range +3 / +7°C
- preferred ambient temperature +16 / +25°C
- power supply 230V / 50Hz
- internal condensing unit
- ecological polyurethane insulation
- body made of powder-coated steel in white colour
- interior made of powder-coated steel in white colour
- electronic control with digital temperature display
- self-closing glass door - choice of door opening direction
- price strips - choice of colours
- 4 stainless steel perforated shelves
- forced air circulation with fan switch when doors are opened
- automatic defrost and evaporation system
- LED internal illumination - white colour
- LED illuminated banner above doors - choice of panel colours
- 1 year full warranty service and after warranty service provided




I-Malta 1*

Choice of colours:

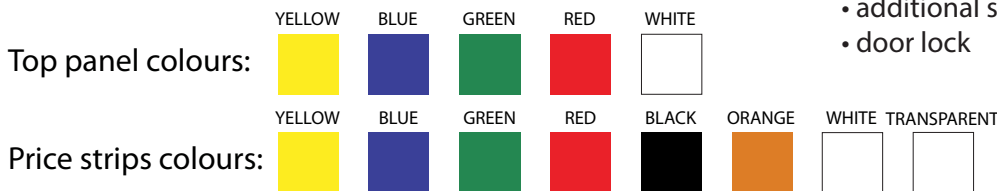

Optional colours:



Available options:

- body made of powder-coated steel - optional colours
- body made of stainless steel
- interior made of stainless steel
- horizontally divided doors
- additional shelf
- door lock

* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.