
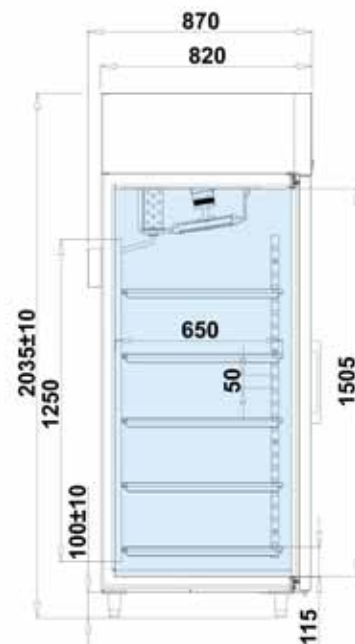


Catering Fridges- I-Ola 2 AG GASTRO

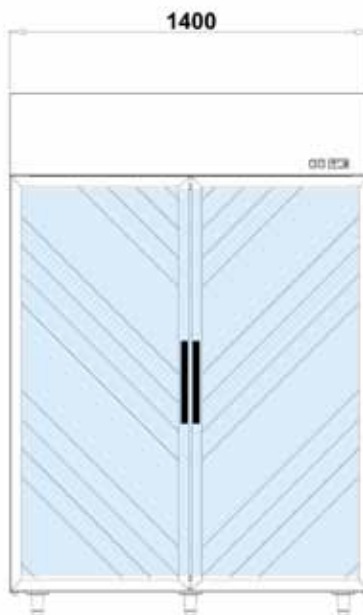

I-Ola 2 AG GASTRO*

Technical parameters:

| Model | Dimension (ext.) H x W x D [mm] | Capacity [dm ³] | Shelves with low base | Power Consumption [kWh/24h] | Weight [kg] |
|-------------------|---------------------------------------|--------------------------------|-----------------------------|-----------------------------------|----------------|
| I-Ola 2 AG GASTRO | 2035 x 1400 x 870 | 1400 | 11 | 8,40 | 210 |

* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

Catering Fridges- I-Ola 2 AG GASTRO



Description:


I-Ola 2 AG GASTRO*

- temperature range +1 / +10°C
- preferred ambient temperature +16 / +25°C
- power supply 230V / 50Hz
- internal condensing unit placed on the top
- ecological polyurethane insulation
- body made of powder coated steel in white colour
- interior made of stainless steel
- electronic control with digital temperature display
- self-closing glass door
- 10 shelves (530x650mm)
- frame with rails prepared for GN1/1 trays
- forced air circulation with fan switch when doors are opened
- automatic defrost
- water condensate tray
- LED internal illumination - white colour
- 1 year full warranty service and after warranty service provided

Available options:

- body made of powder coated steel - optional colours
- body made of stainless steel
- interior made of acid resistant stainless steel
- automatic condensate evaporation
- additional shelf
- GN 1/1 tray 40mm deep
- GN 1/1 tray 100mm deep

Optional colours:



Body colours:

* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.