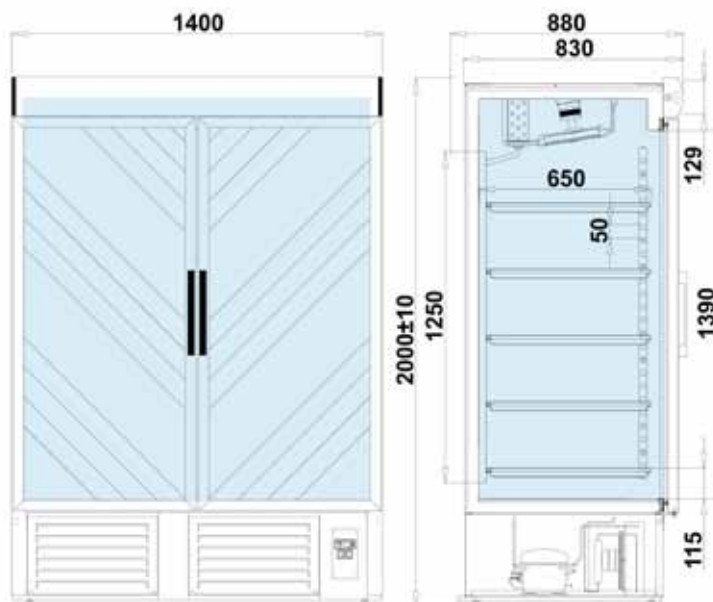**IGLOTECH**

Catering Fridges- I-Ola 2 GASTRO

I-Ola 2 Gastro*

Technical parameters:

Model	Dimension (ext.) H x W x D [mm]	Capacity [dm³]	Shelves with low base	Power Consumption [kWh/24h]	Weight [kg]
I-Ola 2 GASTRO	2000 x 1400 x 870	1400	11	8,70	210

* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

CFC FREE

CE

IGLOTECH

Professional Refrigeration Equipment

Contact us at:
tel/fax: +353 128 111 70

e-mail: office@iglotech.ie
website: www.iglotech.ie

Catering Fridges- I-Ola 2 GASTRO

I-Ola 2 Gastro*

Description:

- temperature range +1 / +10°C
- preferred ambient temperature +16 / +25°C
- power supply 230V / 50Hz
- internal condensing unit
- ecological polyurethane insulation
- body made of powder coated steel in white colour
- interior made of stainless steel
- electronic control with digital temperature display
- self-closing glass door
- 10 shelves (530x650mm)
- frame with rails prepared for GN1/1 trays
- forced air circulation with fan switch when doors are opened
- automatic defrost
- water condensate tray
- LED internal illumination - white colour
- LED illuminated banner above doors - choice of panel colours
- 1 year full warranty service and after warranty service provided

Available options:

- body made of powder coated steel - optional colours
- body made of stainless steel
- interior made of acid resistant stainless steel
- automatic condensate evaporation
- additional shelf
- GN 1/1 tray 40mm deep
- GN 1/1 tray 100mm deep

Choice of colours:

Top panel colours:

YELLOW	BLUE	GREEN	RED	WHITE

Optional colours:

Body colours:

RAL 1018	RAL 5005	RAL 6029	RAL 3020	RAL 8014	RAL 9006	RAL 7031	RAL 9003	RAL 9005	RAL 7001	Gold

* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

CFC FREE

CE