


Catering Freezers- I-Ola 2 M GASTRO

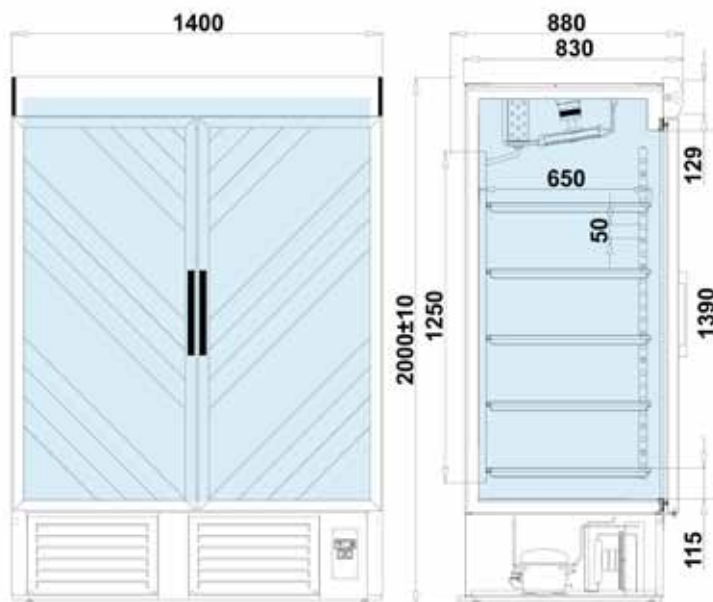

I-Ola 2 M Gastro*

Technical parameters:

Model	Dimension (ext.) H x W x D [mm]	Capacity [dm ³]	Shelves with low base	Power Consumption [kWh/24h]	Weight [kg]
I-Ola 2 M GASTRO	2000 x 1400 x 870	1400	11	16,10	210

* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

Catering Freezers- I-Ola 2 M GASTRO



Description:

- temperature range -12 / -18°C
- preferred ambient temperature +16 / +25°C
- power supply 230V / 50Hz
- internal condensing unit
- ecological polyurethane insulation
- body made of powder coated steel in white colour
- interior made of stainless steel
- electronic control with digital temperature display
- self-closing glass door
- heated door frame
- 10 shelves (530x650mm)
- frame with rails prepared for GN1/1 trays
- forced air circulation with fan switch when doors are opened
- automatic defrost
- automatic condensate evaporation
- LED internal illumination - white colour
- LED illuminated banner above doors - choice of panel colours
- 1 year full warranty service and after warranty service provided

I-Ola 2 M Gastro*

Available options:

- body made of powder coated steel - optional colours
- body made of stainless steel
- interior made of acid resistant stainless steel
- additional shelf
- GN 1/1 tray 40mm deep
- GN 1/1 tray 100mm deep


Choice of colours:

Top panel colours:



Optional colours:

Body colours:



* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.