


## Catering Storage Fridges- I-Ola P GASTRO

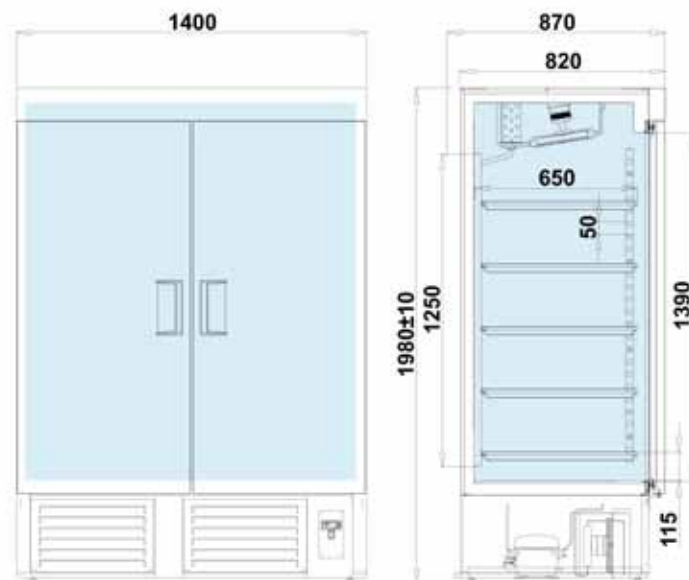

I-Ola P Gastro\*

### Technical parameters:

Model	Dimension (ext.) H x W x D [mm]	Capacity [dm <sup>3</sup> ]	Shelves with low base	Power Consumption [kWh/24h]	Weight [kg]
I-Ola P GASTRO	1980 x 1400 x 870	1400	11	8,20	200

\* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

## Catering Storage Fridges- I-Ola P GASTRO



**I-Ola P Gastro\***


### Description:

- temperature range +1 / +10°C
- preferred ambient temperature +16 / +25°C
- power supply 230V / 50Hz
- internal condensing unit
- ecological polyurethane insulation
- body made of powder coated steel in white colour
- interior made of stainless steel
- electronic control with digital temperature display
- self-closing door
- 10 shelves (530x650mm)
- frame with rails prepared for GN1/1 trays
- forced air circulation with fan switch when doors are opened
- automatic defrost
- water condensate tray
- 1 year full warranty service and after warranty service provided

### Available options:

- body made of powder coated steel - optional colours
- body made of stainless steel
- interior made of acid resistant stainless steel
- interior LED illumination
- automatic condensate evaporation
- additional shelf
- GN 1/1 tray 40mm deep
- GN 1/1 tray 100mm deep

### Optional colours:



\* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.