


Refrigerated Multideck - I-Pioneer



I-Pioneer*

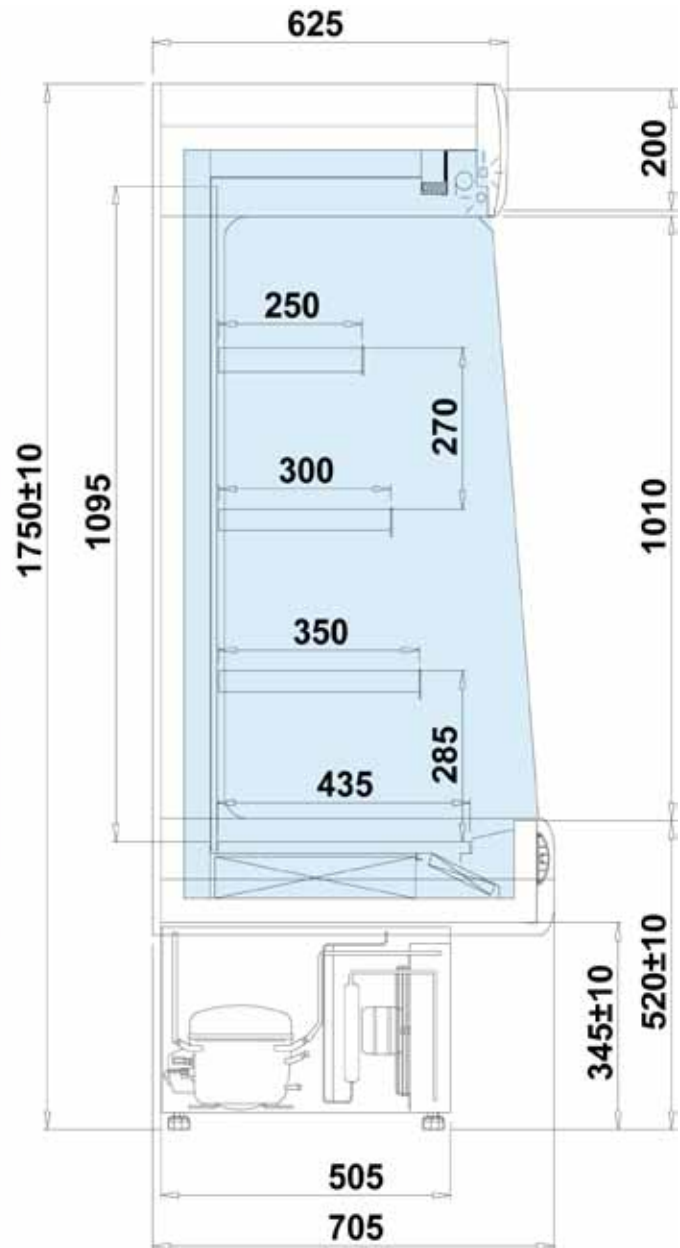

Technical parameters:

| Model | Dimension (ext.) H x W x D [mm] | Display surface [m ²] | Shelves with low base | Power Consumption [kWh/24h] | Weight [kg] |
|-----------|---------------------------------------|-----------------------------------------|-----------------------------|-----------------------------------|----------------|
| I-Pioneer | 1750 x 840 x 705 | 1,20 | 4 | 14,20 | 100 |

* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

Refrigerated Multideck - I-Pioneer



I-Pioneer*


Description:

- temperature range +3 / +10°C
- preferred ambient temperature +16 / +25°C
- power supply 230V / 50Hz
- internal condensing unit
- ecological polyurethane insulation
- white exterior finish (base and front)
- interior and exposition area made of powder coated steel (white colour)
- base bumper - choice of colours
- interior top LED lighting in white colour
- top PERSPEX panel illuminated with LED light - choice of colours
- ABS side walls with glass - choice of colours
- 3 adjustable shelves
- price strips - choice of colours
- night blind - manual
- electronic control with temperature display
- automatic defrost system
- automatic condensate evaporation
- 1 year full warranty service and after warranty service provided


Available options:

- additional LED lights under shelves
- front colour - optional colours
- base colour - optional colours
- interior and shelves made of stainless steel
- interior and shelves made of acid resistant stainless steel
- shelf edge risers
- LED light colour (meat)

Choice of colours:



Optional colours:



* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.