



Refrigerated Serve Overs - I-Santiago V

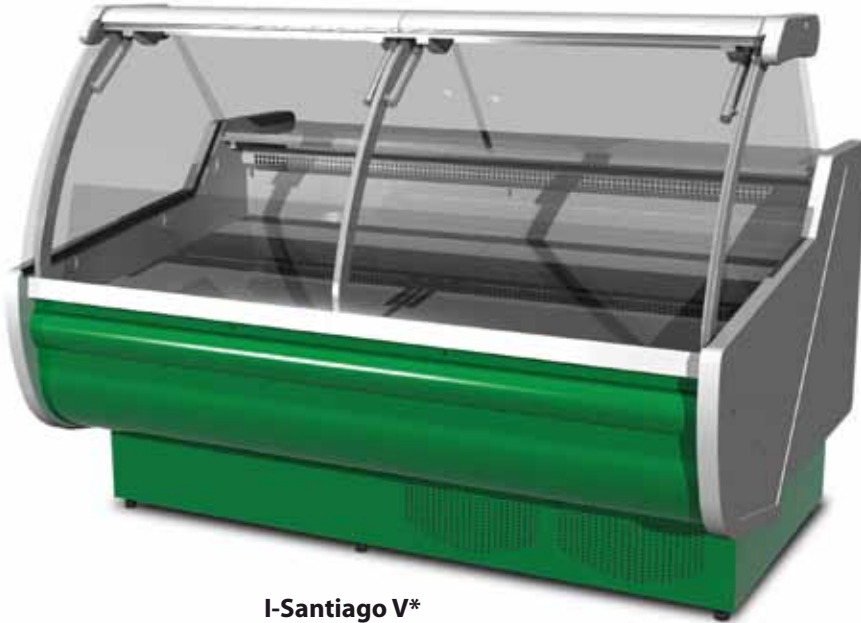

I-Santiago V*

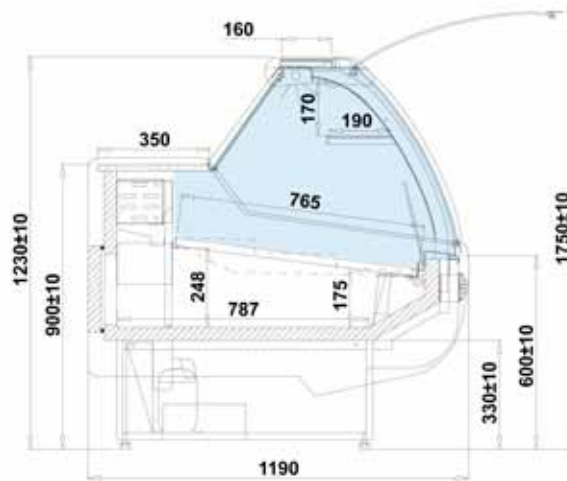


Technical parameters:

Model	Dimension (ext.) H x W x D [mm]	Display surface [m ²]	Power Consumption [kWh/24h]	Weight [kg]
I-Santiago 1.1 V	1230 x 1040 x 1190	0,80	3,70	145
I-Santiago 1.4 V	1230 x 1370 x 1190	1,00	3,80	165
I-Santiago 1.7 V	1230 x 1670 x 1190	1,20	4,90	195
I-Santiago 2.0 V	1230 x 2000 x 1190	1,50	5,20	220
I-Santiago 2.5 V	1230 x 2540 x 1190	1,90	7,10	295
I-Santiago 3.75 V	1230 x 3830 x 1190	2,90	15,10	435

* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.

Refrigerated Serve Overs - I-Santiago V

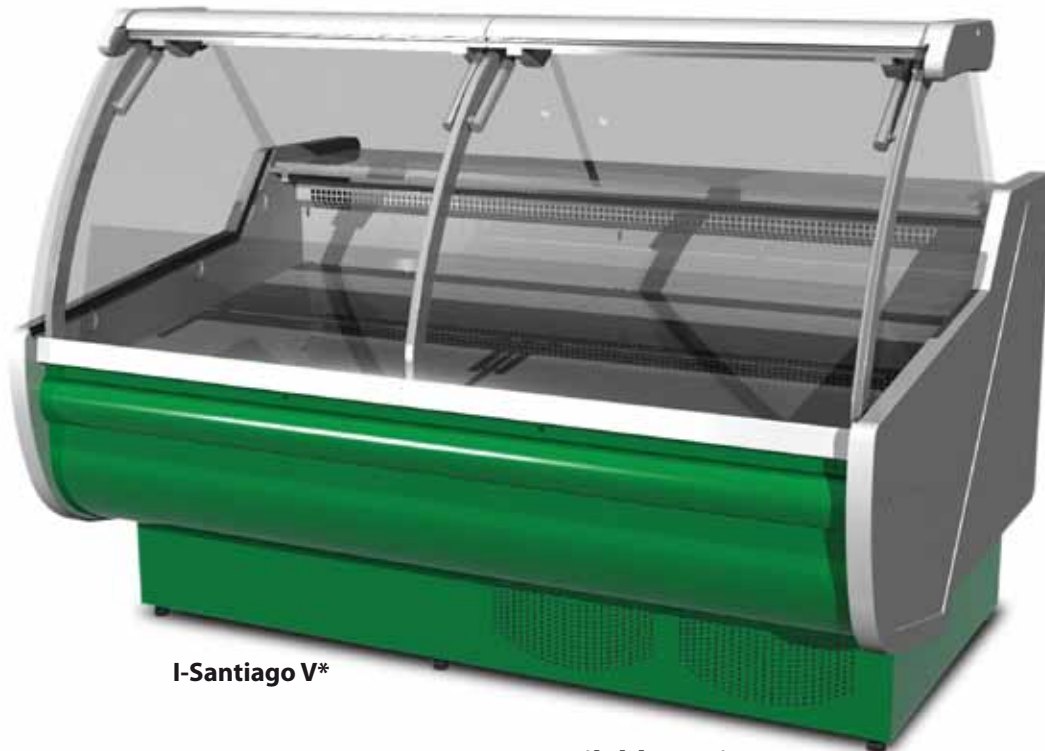

I-Santiago V*

Description:

- temperature range +1 / +8°C
- preferred ambient temperature +16 / +25°C
- power supply 230V / 50Hz
- internal condensing unit
- ecological polyurethane insulation
- external housing made of white coated steel - from staff side
- base and front made of powder coated steel - white
- aluminium glass frames colour - choice of colours
- plastic front bumper - choice of colours
- display deck depth 765mm
- exposition surface made of stainless steel
- refrigerated under-storage made of stainless steel
- 350mm width worktop - stainless or grey granite
- electronic control with temperature display
- automatic defrost system
- forced air circulation
- curved front glass - telescopic lifting system
- perspex blinds
- interior LED lighting colour (meat)
- water condensate tray
- ABS side walls (40mm thick) - choice of colours
- 1 year full warranty service and after warranty service provided

Choice of colours:

Side walls colours: 

Bumper colours: 

Aluminium frames colours: 

Available options:

- multiplexing
- prepared to work with external condensing unit
- external housing made of stainless steel (staff side)
- front panel colour - optional colours
- base colour - optional colours
- exposition area stepped (2 steps)
- exposition area stepped (3 steps)
- exposition area made of acid resistant stainless steel
- storage chamber made of acid resistant stainless steel
- powder painted evaporator
- worktop made of granite (blamoral) 20mm thick
- worktop made of granite (black) 20mm thick
- LED light colour (white)
- LED light colour (confectionary)
- additional exposition glass shelf (ambient)
- customer front shelf (aluminium profile gold or silver colour)
- set of wheels (castors)
- movable partition (glass on stands, placed in exposition area)
- fixed top partition (high glass fixed in exposition area)
- automatic condensate evaporation (internal condensing unit only)
- analog thermometer
- socket with fuse

Optional colours:

Granites: 

Front colours: 

Base colours: 

* - Picture above presents unit with either some or all available extras. Please note that the look of basic version of cabinet, or one of your choice, may vary from presented.